


Series **H**

LAMBDA 
An Invensys company

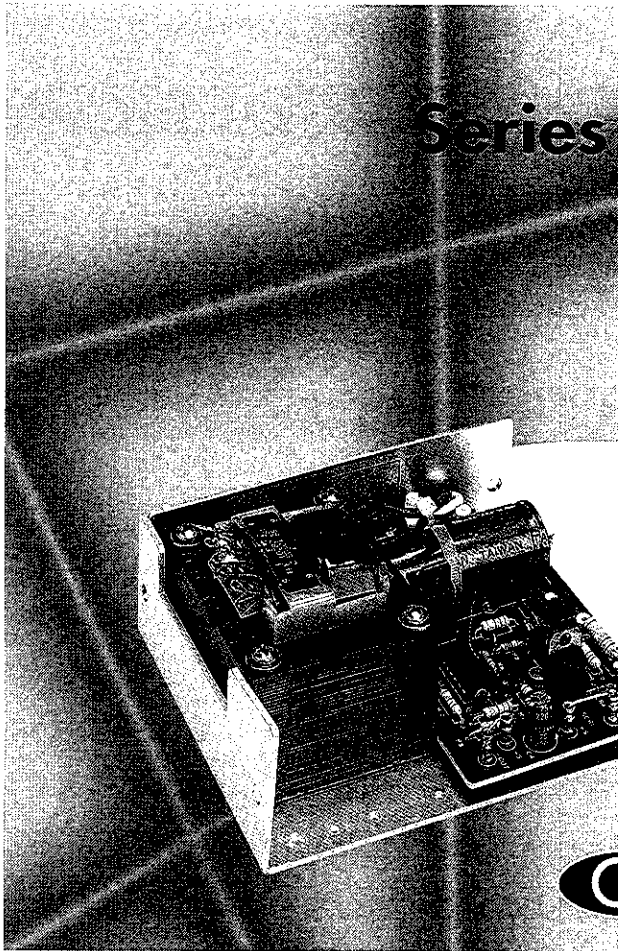

15-100

WATTS

POWER SUPPLY AC/DC

**SINGLE, DUAL OR
TRIPLE OUTPUT**

Low cost

Conforms to UL, CSA, EN*

Regulation <0.1%

Linear Technology

Low ripple and noise

Guarantee 1 year

*** Contact Technical Sales
for current status of approvals**

INPUT

Input voltage range	100-120-220-230-240 VAC ± 10%
Voltage selection	on input transformer
Frequency	47 to 63Hz

OUTPUT

Power (natural convection)	15 at 100W
Adjustment voltage range	± 5% minimum
Line regulation	± 0.15%
Load regulation (0 at 100% loading)	± 0.15%
PAR	3mV max.
Temperature coefficient	0.01%/°C
Over current protection	fold back
Over voltage protection on 5V models	6.2V ±0.4V
on other models	optional
Remote sense	250mV per line

GENERAL

Efficiency models 5V	45%
models 12/15V	55%
models 24V	60%
Isolation voltage	
Input-outputs grounded	1500V RMS
Input-ground	1500V RMS
Output-ground	500V DC
Isolation resistance	
Input-output	30MΩ
MTBF	≥50000 hours

ENVIRONMENTAL

Operating temperature range	0°C to +70°C
Derating (typ) 50 at 70°C	3%/°C
Storage temperature	-55°C to +85°C
Humidity (non-condensing)	5% at 90% RH

TECHNICAL SPECIFICATION

PHYSICAL SPECIFICATION

Dimensions	see table below
Weight	HSB : 0.9kg; HSC : 1.8kg; HSD : 3.4kg HSN : 2.7kg; HDA : 0.9kg; HDB : 1.8kg HDC : 3.2kg; HTC : 2.3kg; HTD : 3.6kg

Type of connections

input/output soldered

Format


open frame chassis

All specifications are at nominal input voltage, full load and at 25°C

ELECTRICAL SPECIFICATION

Model	Maximum power* Watts	Output N°1		Output N°2		Output N°3	
		Volts	Amp.	Volts	Amp.	Volts	Amp.
HSB 5-3 OVP	15	5	3				
HSC 5-6 OVP	30	5	6				
HSN 5-9 OVP	45	5	9				
HSD 5-12 OVP	60	5	12				
HSB 12-1.7	20	12	1.7				
HSC 12-3.4	40	12	3.4				
HSN12-5.1	60	12	6.1				
HSN 15-1.5	20	15	1.5				
HSC 15-3	45	15	3				
HSN 15-4.5	70	15	4.5				
HSB 24-1.2	30	24	1.2				
HSC 24-2.4	60	24	2.4				
HSN 24-3.6	90	24	3.6				
HSD 24-4.8	100	24	4.8				
HDA 12/15	24	12	1	12	1		
HDB 12/15	40	12	1.8	12	1.8		
HDC 12/15	80	12	3.4	12	3.4		
HTC 1	40	5	3	+12/15	1/0.8	-12/15	1/0.8
HTD 1	70	5	6	+12/15	1.7/1.5	-12/15	1.7/1.5

PHYSICAL SPECIFICATION

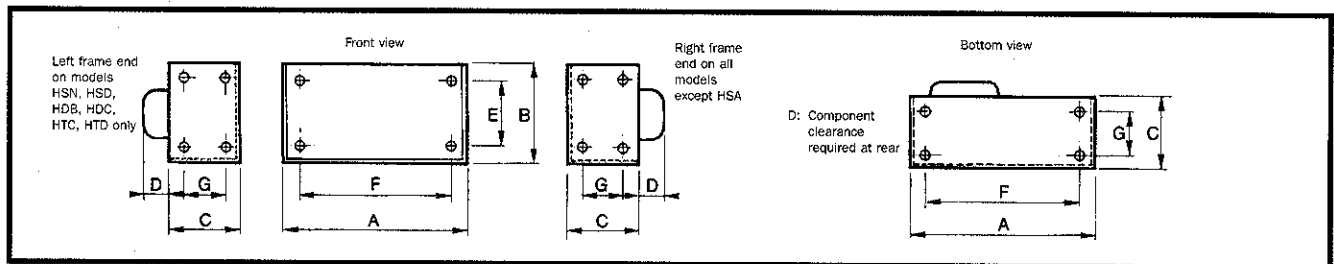

Model	Length		Depth		Height		Extension		Fixations	
	A	B	C	D	E	F	G			
HSB	124	101	41	8	86	105	-			
HSC	143	124	63	12	105	124	-			
HSN	178	124	70	12	105	159	32			
HDB	178	124	70	12	105	159	32			
HTCI	260	102	64	12	86	235	32			
HTDI	280	124	70	15	105	190	32			
HDA	165	102	42	8	86	146	-			
HSD/HDC	229	124	70	15	105	203	32			

Series H

LAMBDA

An Invensys company

EDITION 2001