


MBS48-SERIES

(DC line filter)

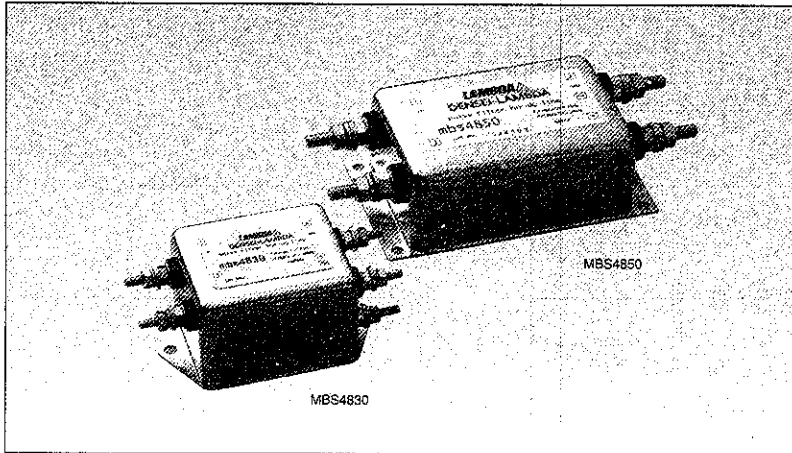

Features

- 1) High attenuation for any noise from low frequency to high frequency by applying large capacity condenser for DC 48V power line
Major application: Information and telecommunication equipment
- 2) Large stud terminal type
Several wiring connections available
- 3) Cost saving design
Compared with our current noise filter for the same capacity for AC input,
Volume: Less than 30%
Area occupation: Less than 45%

CAUTION! MBS48 series shall be noise filters for DC 48V power line only. Use for AC power line is not available.


Specifications

Item	Model	MBS4830	MBS4850
1	Rated voltage (DC)	48V (72V DC max)	
2	Rated current (DC) (Note1)	30A	50A
3	Overload durability (DC) (Note1)	45A (150% of rated current: within 1 min.)	75A (150% of rated current: within 1 min.)
4	Test voltage terminal to case, DC 1 minute	700V(20mA)at 25°C,70%RH	
	terminal to terminal, DC 1 minute	100V(20mA)at 25°C,70%RH	
5	Isolation resistance (terminal to case, 500VDC)	500MΩmin. at 25°C,70%RH	
6	DC resistance	8mΩ	4mΩ
7	Temperature rise	35°C max.	30°C max.
8	Operating temperature	-25 ~ +85°C	
9	Operating humidity	30% ~ 95% RH (No dewdrop)	
10	Storage temperature	-40 ~ +85°C	
11	Storage humidity	10% ~ 95% RH (No dewdrop)	
12	Vibration	Sweep: 10 ~ 55 ~ 10 Hz(for 1 minute), Amplitude: 1.5 mm X,Y and conforms to Z axes for 2 hours	
13	Weight (typ)	310g	650g


(Note1) : Value at Ta ≤ 50°C. Refer to the derating curve shown below at Ta > 50°C.

Circuit


MBS4830

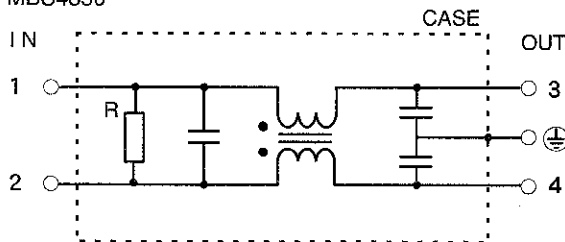

MBS4850

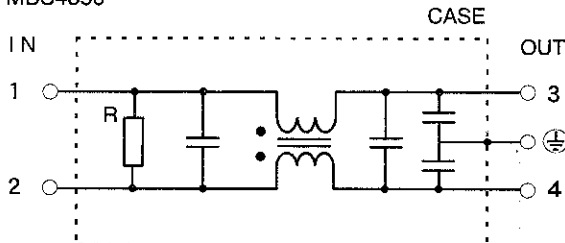


Derating

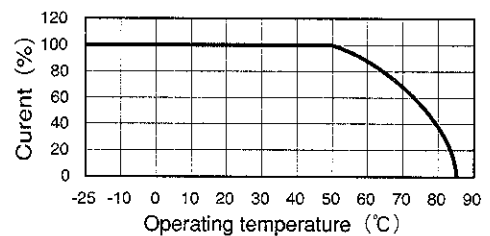

- Request customer specification for further details of specifications, outline, characteristics, etc. Read the instruction manual before usage.
- Contact us about delivery before ordering.

MBS48-SERIES

■ MBS4830

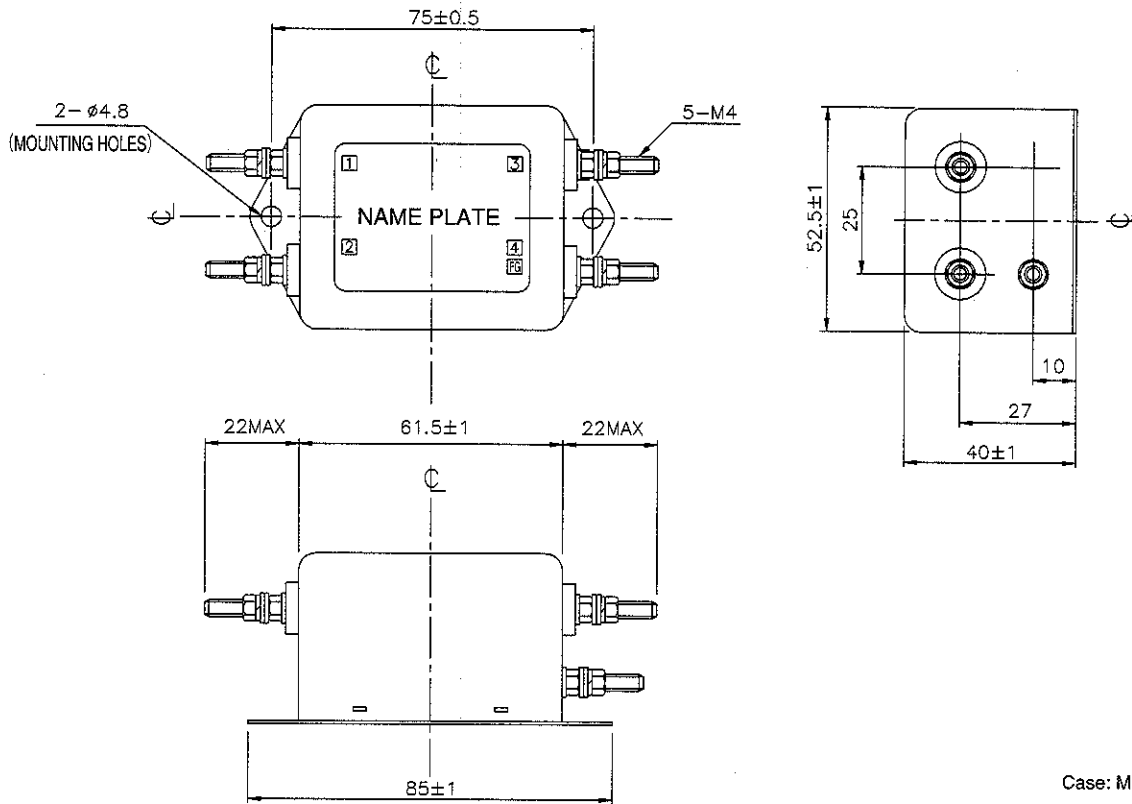


Case: Metal

(Unit: mm)

Noise Filter

■ MBS4850

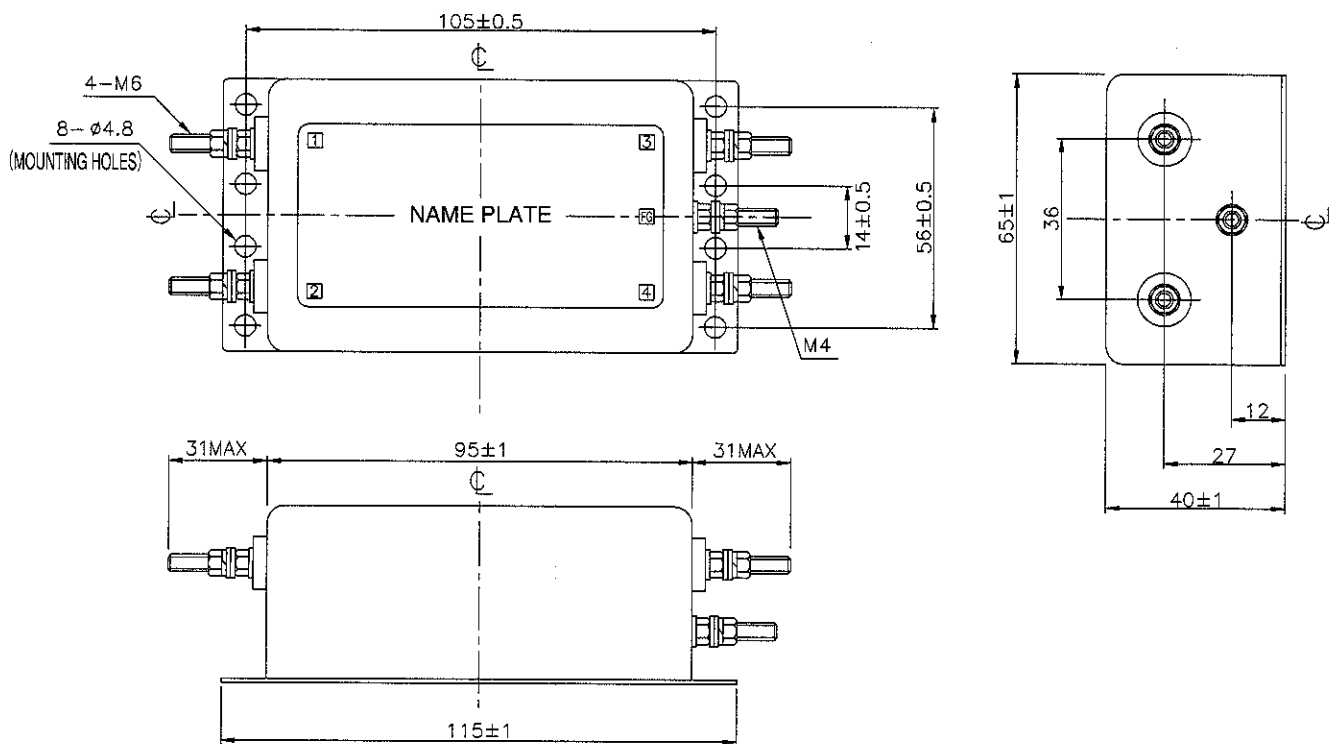

Case: Metal

(Unit: mm)

MBS48-SERIES


CHARACTERISTICS

■ Typical Insertion Loss


(1) Asymmetrical

(2) Symmetrical


■ MBS4830

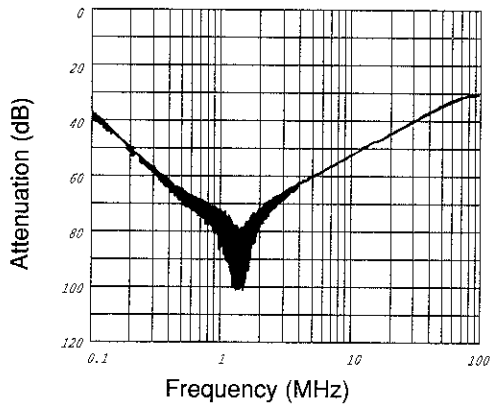


■ MBS4830

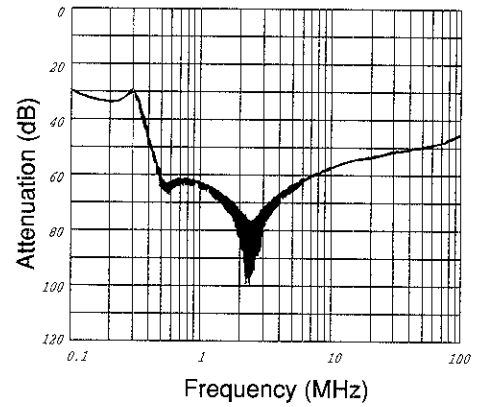

■ MBS4850

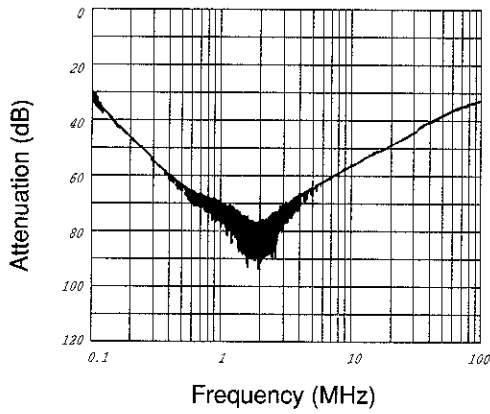

■ MBS4850

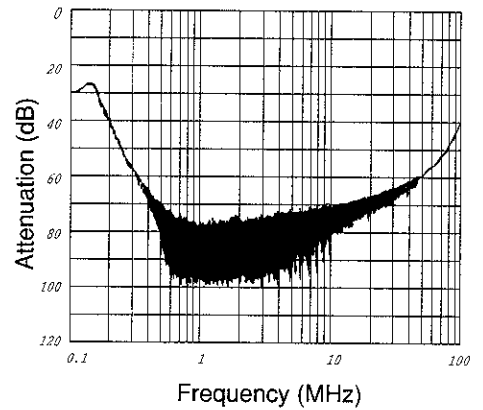

Noise Filter